


| Model No. | GLD4X-MI Indoor (Mobil) Videowall |
|---------------------------|-----------------------------------|
| Pixel Pitch | 4,81mm |
| LED | SMD2020(Black) |
| System Resolution | 104x104 pixel |
| Pixel Density | 43264dots/m ² |
| Brightness | 800-1100nit |
| Color Temperature | 6500-9500K |
| Drive Mode | 1/13scan |
| Grey Scale | 14-16bit |
| Refresh Rate | 1920Hz |
| Input | DVI (Cat5 max. Distance 100m) |
| Best Viewing Angle | H: 160° V:140° |
| Max Power Consumption | ≤650w/m ² |
| Average Power Consumption | ≤325w/m ² |
| LED Lifetime | 50.000h |
| Protection Level | IP30 |
| Working Temperature | -20°C~+40°C |
| Working Humidity | 10%-60% |
| System Size (W*H*D) | 500*500*75mm |
| System Weight | 8kg |
| Service | front |

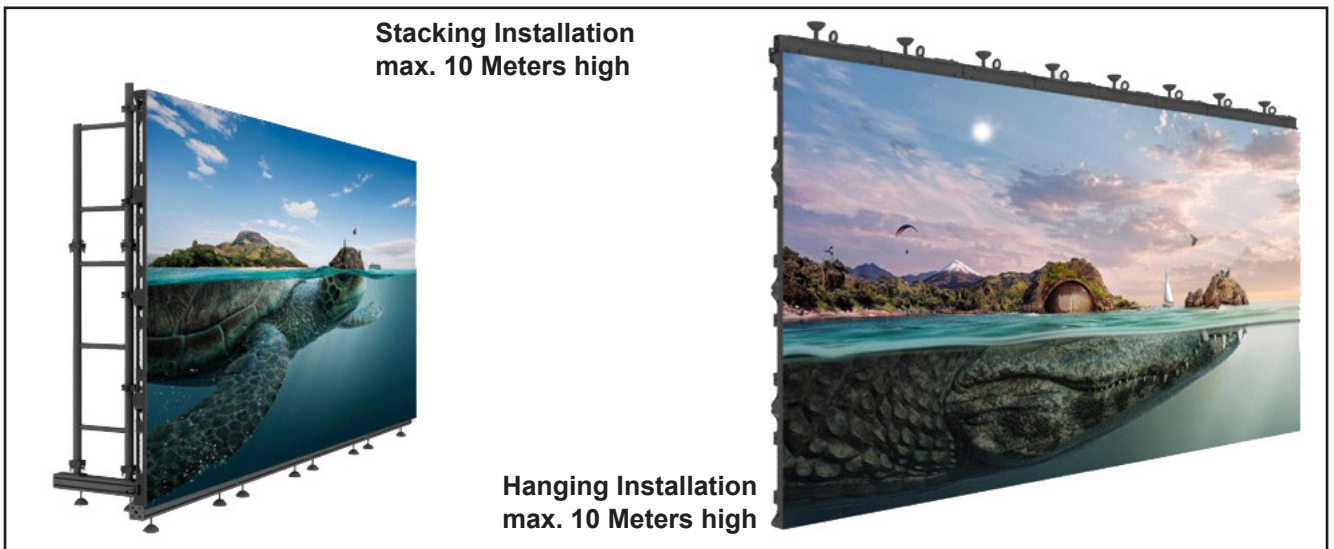

Anderungen im Sinne des Fortschritts, Irrtümer und Druckfehler vorbehalten.